


VEN tac
G R O U P

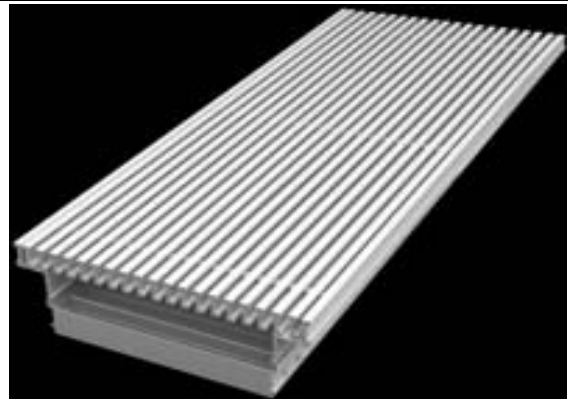

Heavy Duty Floor Grilles

VEN tac
air management

VEN tac
noise control

VEN tac
laboratories

Heavy Duty Floor Grilles

HDFG

Introduction

The Waterloo HDFG heavy duty floor grille has been designed for commercial and industrial applications where heavy foot traffic is experienced. The S type is a 600mm tile replacement and L type is for linear applications; both are available with a recessed border style. This improved design is suitable for use with most types of raised floor pedestal system.

Product description

- HDFG-XS** Extra heavy duty tile replacement with steel subframe
- HDFG-S** Standard tile replacement
- HDFG-L** Linear
- OBSS** Opposed blade damper
- BL** Blanking plate

Features

- HDFG-XS tested to PSA MOB PF2 PS/SPU specification dated March 1992
- Reversible core (0° or 15° discharge)
- Suitable for most pedestal flooring systems
- Facility for on site blanking of linear version
- Recessed border style
- Border alignment facility on linear version

Finish

Mill finish as standard, powder or nylon coating options available on request.

Advantages

- Integrated design features - enabling tile and linear grille combinations for aesthetic continuity
- Improved additional strength design
- Easy "Drop in" installation
- Convenient damper adjustment

Weights

18.0 kg/m² face area

Sizes


- HDFG-S & XS 600 x 600mm
- HDFG-L Length - maximum single section 1000mm
- Width - maximum 600mm
- minimum 100mm

Order Example


HDFG-L/1000x300/MILL/OBSS/BL

Type _____
 Section Length _____
 Section Width _____
 Finish _____
 Damper _____
 Blanking Plate _____


HDFG/L

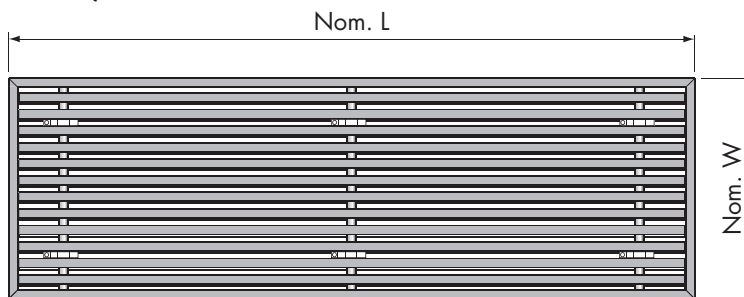


Single unit

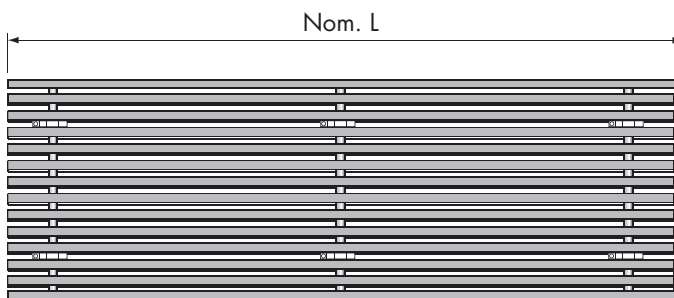


End section

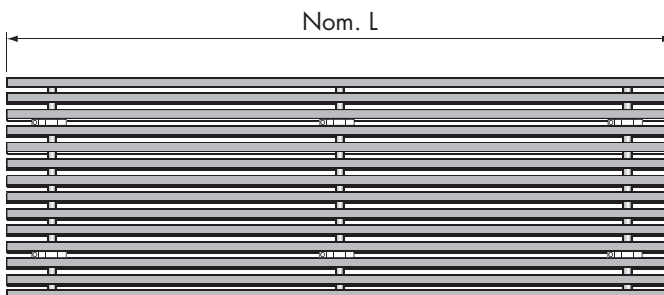

Intermediate section

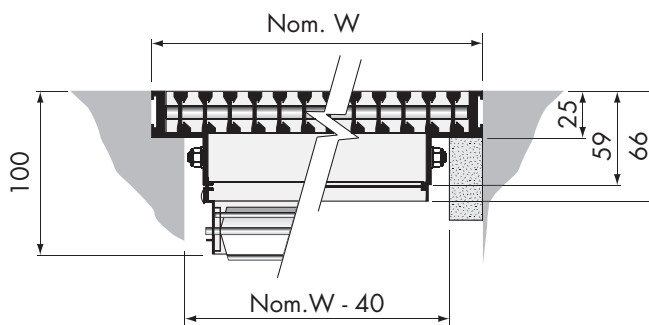

HDFG-L + OBSS // HDFG-L + BL




2 alignment strips supplied with each section for site fixing .

Free Area

47%

Heavy Duty Floor Grilles

HDFG



Please refer to page 2 for used symbols, definitions and criteria.

Selection Example HDFG-L/1200x200

Air Volume 250 l/s/m
Throw 3.6 m
Pressure Drop 7 Pa
Noise Level NR 22

Spectrum Corrections

Frequency (Hz)	125	250	500	1k	2k	4k
Supply	+9	+13	+12	+6	+2	-2
Exhaust	+9	+11	+12	+0	-5	-11

Performance Tables

HDFG-L		Supply Nom.Grille Width (mm)						Extract Nom.Grille Width (mm)						
m ³ /h/m	l/s/m	100	150	200	300	450	600	100	150	200	300	450	600	
180	50	T	1.8											
		P _s	2					3						
		L _p	<20					<20						
270	75	T	2.7	1.5										
		P _s	4	1				6	2					
		L _p	<20	<20				<20	<20					
360	100	T	3.6	2.3	1.3									
		P _s	7	3	1			13	4	2				
		L _p	22	<20	<20			27	<20	<20				
450	125	T	4.4	2.7	1.8									
		P _s	12	4	2			20	6	3				
		L _p	29	<20	<20			34	<20	<20				
540	150	T	5	3.2	2.3	1.3								
		P _s	16	6	3	1		28	9	4	2			
		L _p	32	20	<20	<20		39	23	<20	<20			
630	175	T	5.5	3.6	2.7	1.7								
		P _s	22	7	4	2		37	13	6	3			
		L _p	35	22	<20	<20		43	27	<20	<20			
720	200	T	6	4.2	3	2								
		P _s	29	10	6	3		50	17	9	4			
		L _p	39	26	<20	<20		47	32	21	<20			
900	250	T		4.9	3.6	2.5	1.3							
		P _s		16	7	4	1		28	13	5	2		
		L _p		32	22	<20	<20		38	27	<20	<20		
1080	300	T		5.5	4.3	2.7	1.8	1.2						
		P _s		22	11	4	2	1		37	18	6	3	2
		L _p		36	27	<20	<20	<20		43	32	<20	<20	<20
1440	400	T		7.3	5.7	4	2.7	2						
		P _s		32	22	10	4	2			39	17	6	3
		L _p		45	36	26	<20	<20			45	31	<20	<20
2160	600	T			7	5	3.6	2.7						
		P _s			44	17	7	4				30	13	6
		L _p			43	32	22	<20				43	27	<20
2880	800	T				6.2	4.5	3.4						
		P _s				30	13	7					22	10
		L _p				39	30	20					37	25
3600	1000	T				7.2	5.5	4.3						
		P _s				47	21	11					36	18
		L _p				44	37	28					45	35

HDFG-S		600x600 Tile Replacement		
m ³ /h	l/s		Supply	Return
1080	300	T	2.3	
		P _s	3	5
		L _p	<20	<20
1440	400	T	3	
		P _s	6	8
		L _p	<20	<20
1800	500	T	3.6	
		P _s	8	12
		L _p	22	27
2160	600	T	4.3	
		P _s	11	18
		L _p	28	35

Load Deflection Characteristics

HDFG-XS Floor Grille 600 x 600

Tested to PSA MOB PF2 PS/SPU specification dated March 1992

HDFG-S Floor Grille 600 x 600

Load applied on grille centre line distributed over 25mm x 25mm point between subframe supports.

Maximum recommended point load 400kg.

HDFG-L Floor Grille 300mm Wide

Load applied on grille centre line distributed over 25mm x 25mm point between blade supports.

Maximum recommended point load 360kg.

HDFG-S Floor Grille 600mm Wide



Load applied on grille centre line distributed over 25mm x 25mm point between blade supports.

Maximum recommended point load 180kg.

Heavy Duty Floor Grilles

HDFG


HDFG-S - 600x600

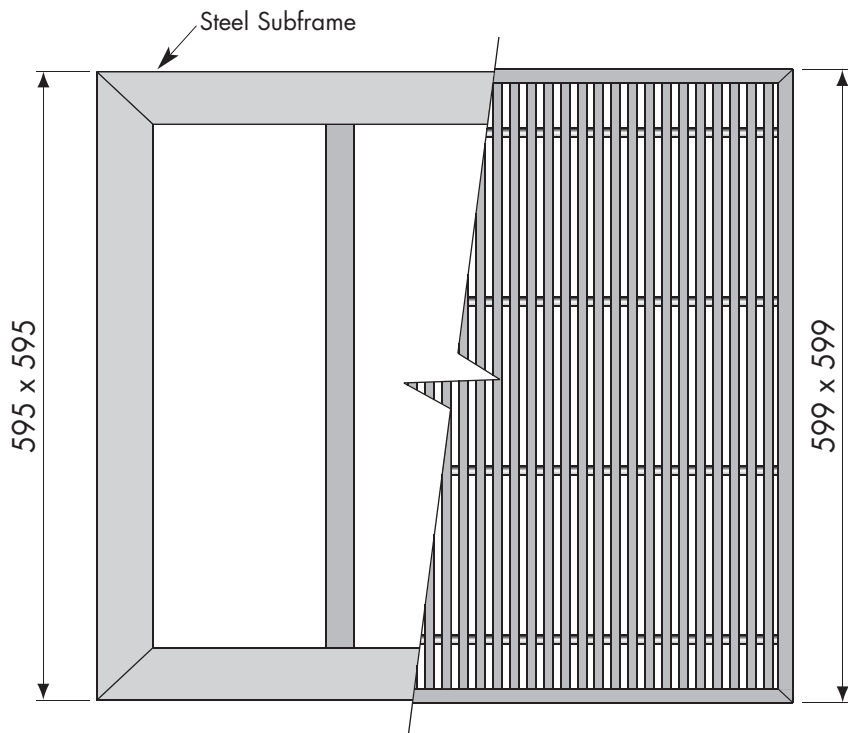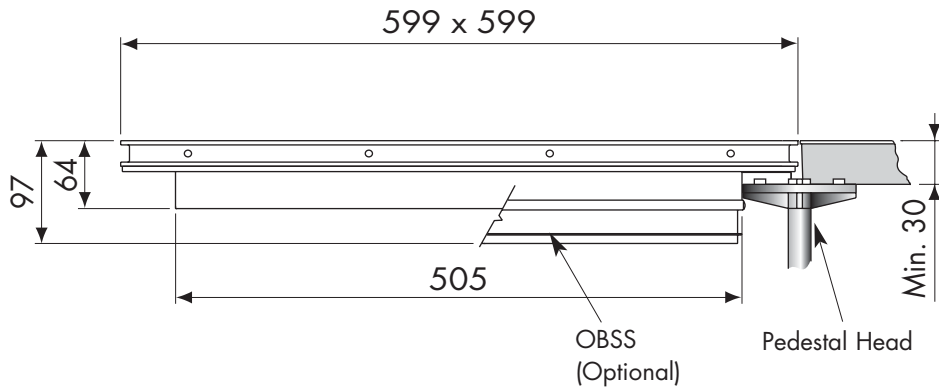

Order Example

HDFG-S/600x600/MILL/OBSS


Type _____
 Nominal Width _____
 Nominal Height _____
 Finish _____
 Option _____

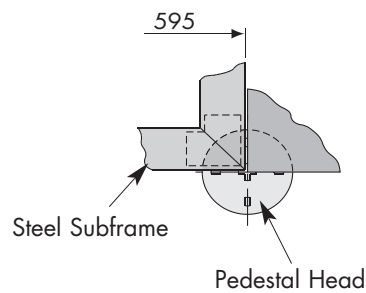

Where possible, full details of pedestal system & finished tile thickness should be provided with order

Heavy Duty Floor Grilles HDFG

HDFG-L - Linear Corner Sections

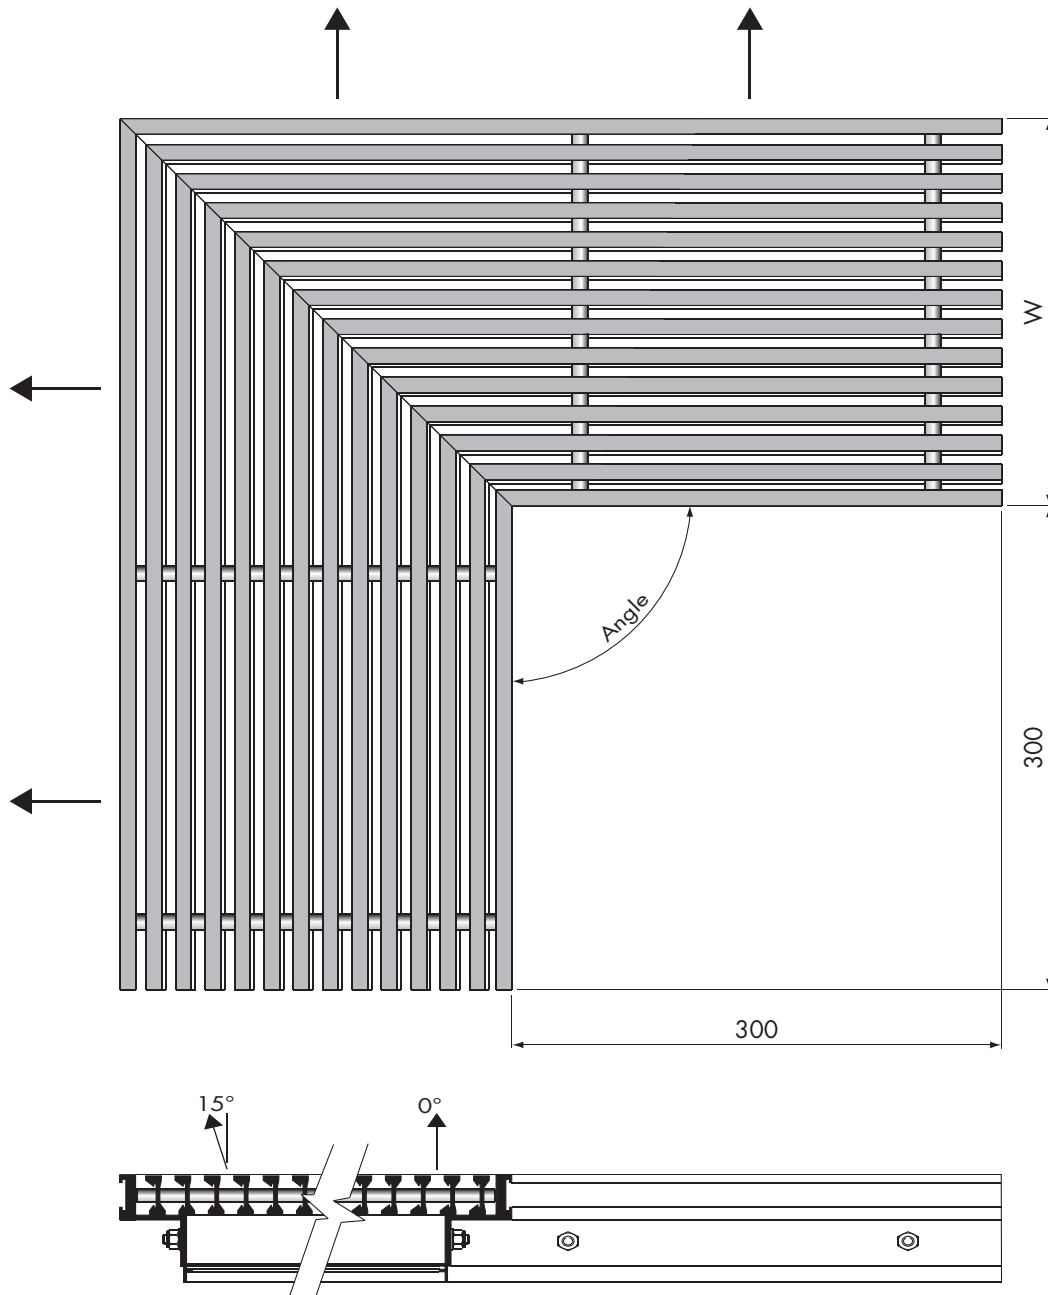

Note:

Orders for corner sections will be made to the configuration shown with a 90° angle. Requirements for angles other than 90° should be identified with a customer drawing or site template.

Orders for installations which include corner sections should clearly identify any preference for core discharge angle relative to the layout (0° or 15°). Unless specified otherwise, corners will be manufactured for 0° deflection.

Order Example


HDFG-L/300/90°/300/100/MILL

Type _____
 Length 1 _____
 Corner Angle _____
 Length 2 _____
 Section Width (W) _____
 Finish _____

VEN tac

G R O U P

www.ventac.com

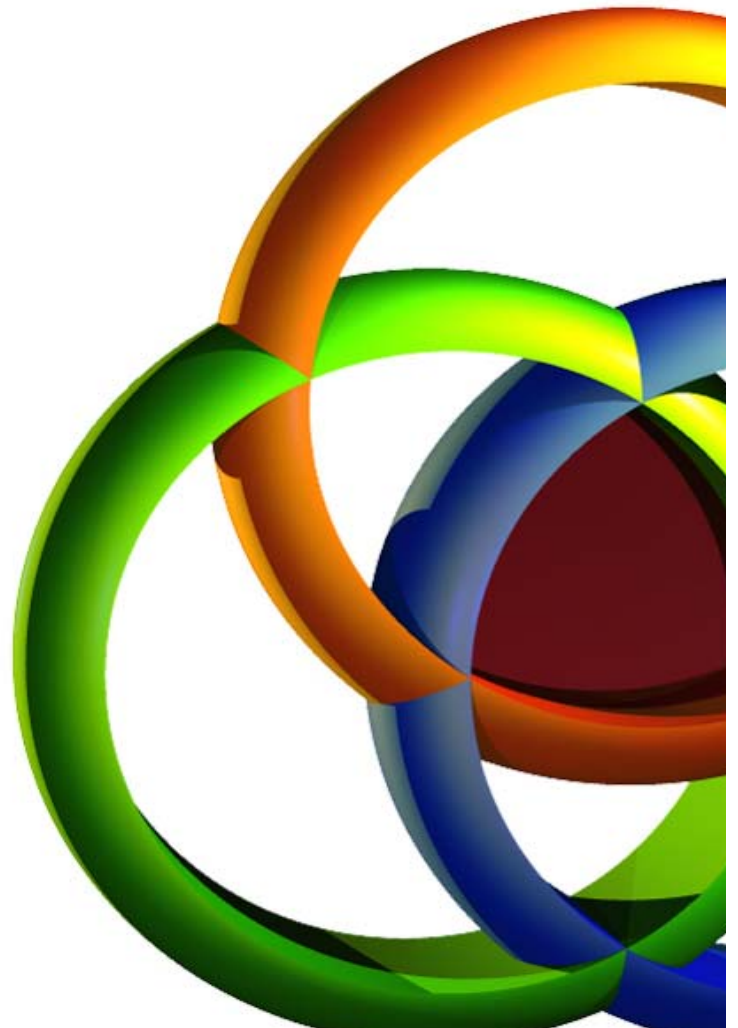

Fitzwilliam House, Blessington, Co. Wicklow, Ireland

t: 045 851500

f: 045 851501

e: sales@ventac.com

VEN tac
air management

VEN tac
noise control

VEN tac
laboratories